

MAN

AdaptiVIT

MAN PrimeServ

AdaptiVIT dynamically adjusts the injection timing to optimize performance based on the current combustion pressure and emission regulations. This innovation ensures maximum efficiency and compliance under all operating conditions.

General

The engines manufactured by MAN ES generally have a manual VIT or an electric VIT, which is deactivated in most cases. The injection timing is constant and usually set to full load. The injection timing can be manually corrected by the operator to set the maximum ignition pressure according to the actual ambient conditions and fuel quality. Our experience in practice shows that most VITs are never touched and the timing remains as it was set when the new engine was commissioned

Basic setting

The electric Variable Injection Timing (VIT) system operates by switching between two fixed positions, which are determined by the engine load.


Depending on the load, the VIT can be in either the EARLY or LATE position. Specifically, when the engine load is less than 87%, the VIT is in the EARLY

position, while for loads exceeding 90%, it switches to the LATE position.

This operation is part of the open-loop control system. Once the positions and load-dependent switching points are set, they remain constant during operation, providing consistent performance and fuel efficiency.

Fuel injection pump arrangement

1. Fuel injection pump
2. Crankcase
3. Fuel injection pump casing, pump drive
4. Injection cam follower
5. Eccentric shaft of VIT
6. Camshaft

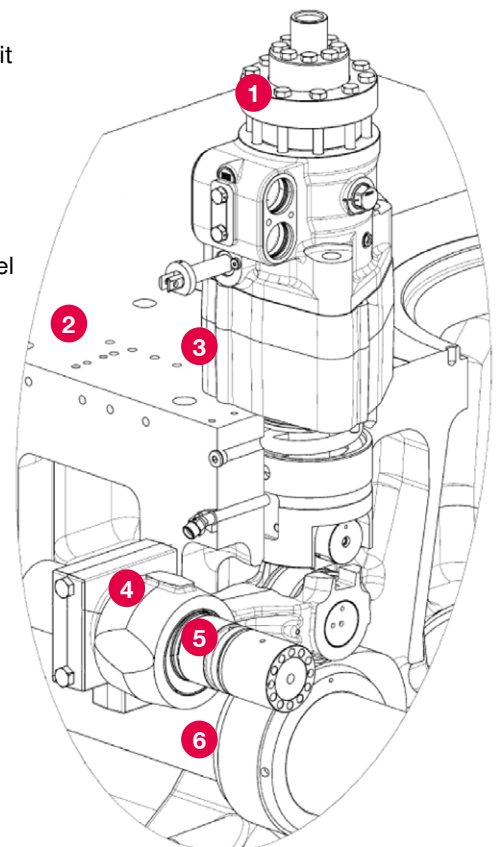


Availability of AdaptiVIT

Engine range	Installed hardware components	Application
MAN 48/60 engine family*	Conventional	Power
MAN 51/60 engine family*	Dual-Fuel	Marine under development
MAN 58/64 engine family*	-	-

*depending on installed hardware components

Control of injection timing in dependence of the combustion pressure and the NO_x emission User

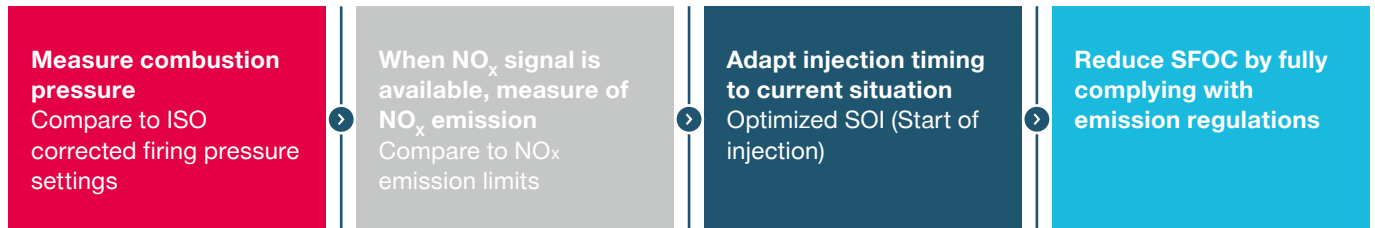

AdaptiVIT in operation


Compensation and optimization of engine performance

Effect 1:

Orange curve (pZ_worn) will be permanently lifted up to original setting (pZ_orig). Dashed curve.
→ compensation

Effect 2:

Original dashed curve (pZ_orig) is optimized for operation between 50 and 90 % load (pZ_opt). Light blue curve.
→ optimization

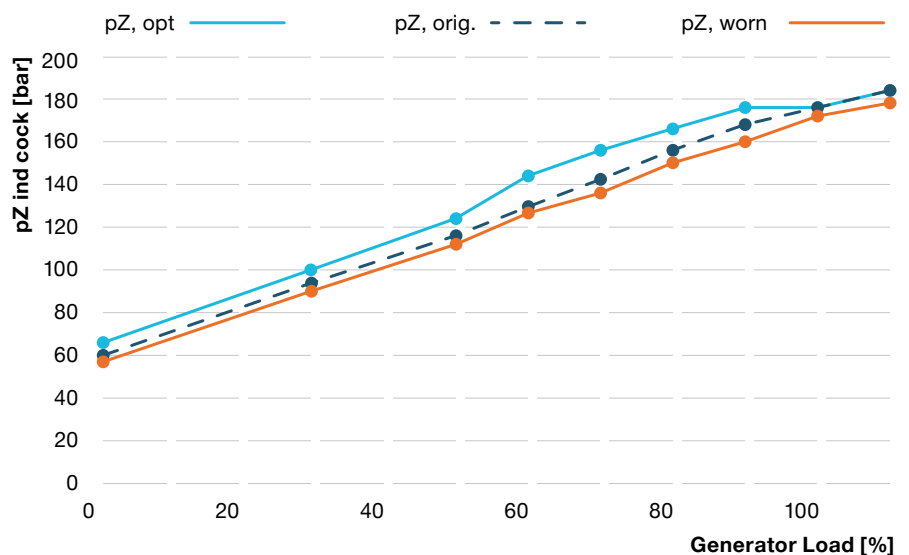

Retrofit & Upgrades

PrimeServ Retrofit, Denmark
RetrofitDK@man-es.com

More information

Contact your local MAN PrimeServ office for more information about the product and how the upgrade can improve your specific engine.

MAN Energy Solutions

MAN PrimeServ
Teglholmsgade 41
2450 Copenhagen SV, Denmark
RetrofitDK@man-es.com
www.man-es.com/primeserv

All data provided in this document is non-binding. This data serves informational purposes only and is not guaranteed in any way. Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions.

Copyright © MAN Energy Solutions. PA 3010 – 0532 – 00 May 2024