

MAN


V48/60CR

Propulsion

The MAN 48/60CR is a striking combination of top performance, operational flexibility and reliability. High power output, low fuel consumption and low emissions make it perfect for every kind of marine application with a mechanical or diesel-electric propulsion drive.

Benefits at a glance

- High efficiency
- High specific power output
- Low emissions
- Low operating and life cycle costs
- Long maintenance intervals and service life
- High reliability

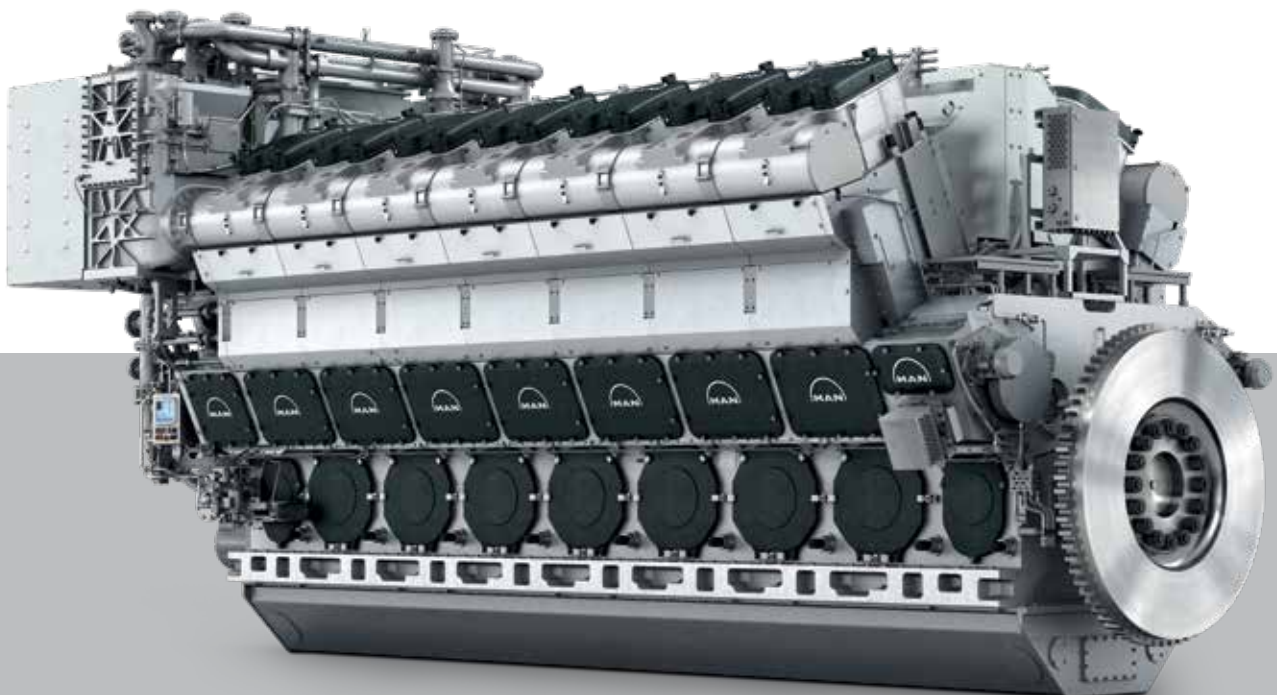

MAN V48/60CR

Propulsion

Dimensions


Cyl. No.		12	14	16
L	mm	10,790	11,790	13,140
L ₁	mm	9,088	10,088	11,088
Dry mass	t	189	213	240

Output

Speed	rpm	514	500
mep	bar	25.8	26.5
MAN 12V48/60CR	kW	14,400	14,400
MAN 14V48/60CR	kW	16,800	16,800
MAN 16V48/60CR	kW	19,200	19,200

Minimum centerline distance for twin engine installation: 4,800 mm

Last updated April 2024

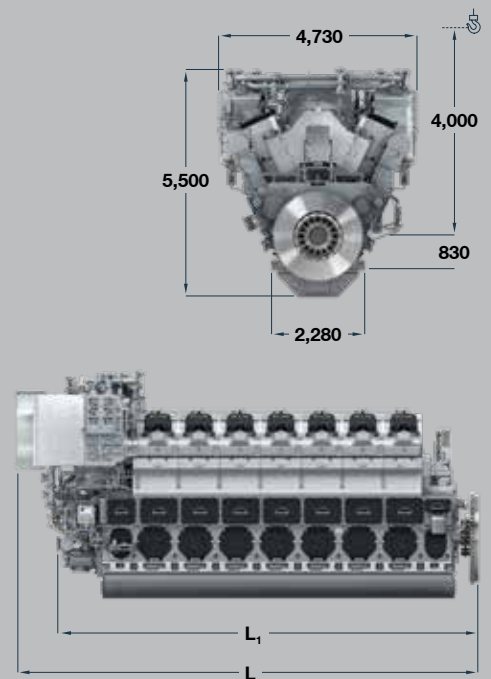

General

- Engine cycle: four-stroke
- No. of cylinders: 12, 14, 16, 18
- Bore: 480 mm – Stroke: 600 mm
- Swept volume per cyl: 108.6 dm³

Fuel consumption at 85 % MCR*

- SFOC: 173.5 g/kWh

Cylinder output (MCR)

- At 514/500 rpm: 1200 kW
- Power-to-weight ratio:
12.3 – 13.1 kg/kW

Compliance with emission regulations

- IMO Tier II
- IMO Tier III (with MAN SCR)

Main features

Turbocharging system

- High efficiency constant pressure MAN TCA series exhaust turbocharging system

Engine automation and control

- MAN in-house developed engine attached safety and control system MAN SaCoS_{one}

Fuel system

- Advanced electronic common rail injection system

Cooling system

- 2-string high and low temperature cooling water systems

Starting system

- Starting air valves within cylinder heads

Engine mounting

- Resilient or rigid mounting

Optional equipment

- MAN ECOMAP concept – using different IMO Tier II compliant injection maps to improve fuel economy
- Additional power take-off at engine free end available

MCR = Maximum continuous rating
SCR = Selective catalytic reduction
SFOC = Specific fuel oil consumption
* According to IMO E2 test cycle

MAN Energy Solutions
86224 Augsburg, Germany
P + 49 821 322-0
F + 49 821 322-3382
info@man-es.com
www.man-es.com