



Synchrophasing

MAN Energy Solutions

Future in the making

Enhanced vibration performance
for twin propulsion vessels

Future in the making

Contents

Introduction **05**

Twin propulsion vibration control by synchrophasing **06**

Concluding remarks **12**

For the increasingly popular twin propulsion design, MAN Energy Solutions has introduced synchrophasing which is a new, and highly effective tool introduced to reduce vibrations of both vessel and engine structure. A comprehensive test period covering over 15 vessels shows a vibration reduction in the range of 50-70%.

Introduction

Today's high-powered two-stroke ME-GI engines pose a significant challenge for hull designers and shipyards in their efforts to comply with stricter and decreased vibration limits stated in the modern ISO standards. MAN Energy Solutions is therefore proud to present our new "tool in the box" for vibration control, commonly known as "synchrophasing".

This highly effective system is now

available for twin-propelled vessels with two-stroke MAN B&W electronically controlled engines installed, such as the ME-GI. Commissioning tests have shown very positive results with average vibration reductions in the range 50-70%, depending on sea wave state and vessel roll/pitch.

The new synchrophasing system reduces vibrations of both vessel and engine structures caused by the

combined excitation dynamics from the port and starboard propulsion systems.

Apart from effectively reducing the vibration levels and thereby the fatigue loading of vessel structures, the system eliminates the so-called vibration beating known to cause the crew discomfort.

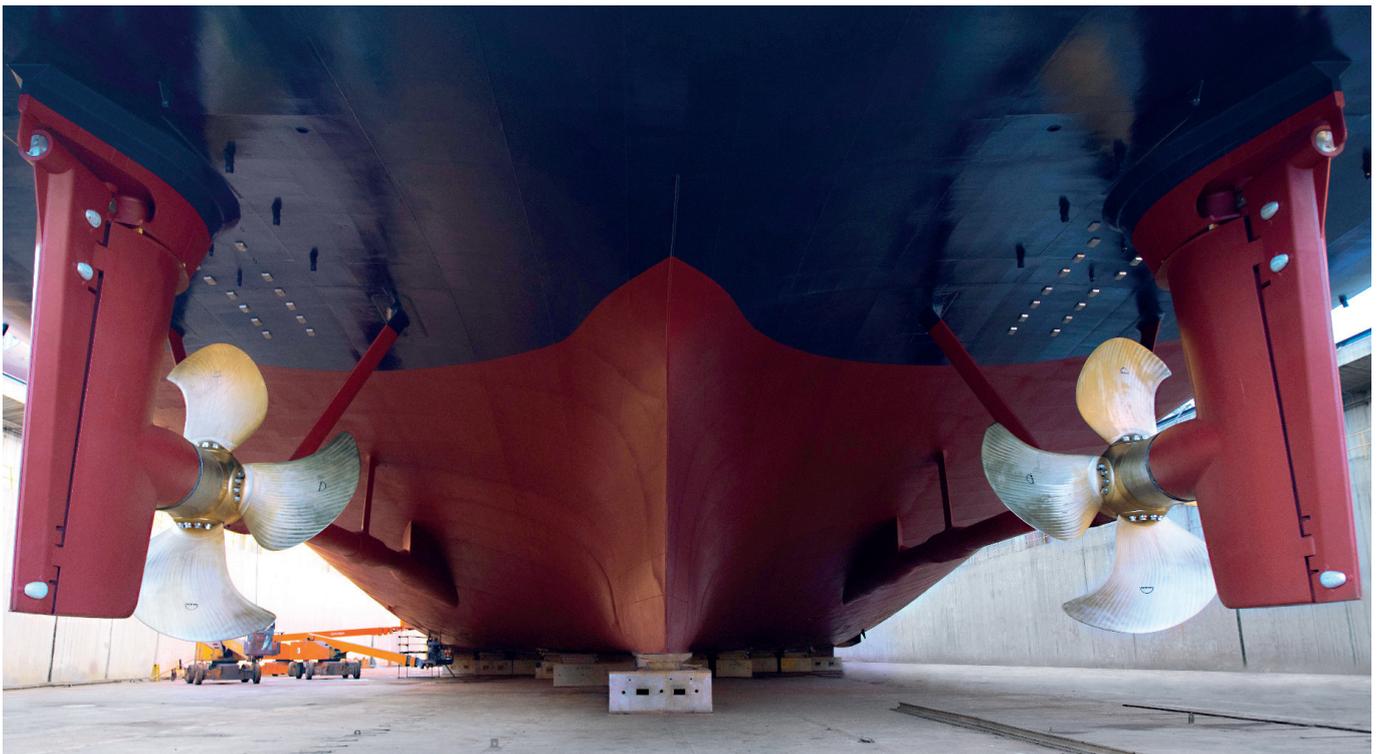


Fig. 1: Twin-propelled vessel

Twin propulsion vibration control by synchrophasing

Reference list

The system has undergone a comprehensive 2-year testing period and it is now considered fully developed. At present state, the synchrophasing system is operational (in service) for a number of LNG carriers that are twin-propelled by our ME-GI engine type. However, the system has been commissioned for a number of other vessel types such as tankers and container vessels as seen in Table 1.

The synchrophasing system is highly flexible as it can control the excitation

source of the most frequent types of structural vibrations encountered in merchant twin-propelled vessels:

- Propeller induced structural vibrations
- Vibrations due to shafting axial thrust forces
- Vibrations due to main engine forces and moments, primarily guide force moments and free external mass moments.

The sheer effectiveness and versatility of this system have eventually become apparent from the testing results,

where many different excitation sources have been controlled and outbalanced by the system (see the last column in Table 1).

Table 1: Synchrophasing reference list – November 2018

ME-GI	Date	Vessel type	Vessel size	Engine type	Synchro phasing status	Vibration focus	Excitation source
×	July - 2016	LNG carrier	81605 DWT	2 x 7G70ME-C9.2-GI	In service	Global deck house Longitudinal/Transverse directions	H-Type: 7th order Propellor: 3rd order Propellor: 6th order
×	Sept 2016	LNG carrier	81605 DWT	2 x 7G70ME-C9.2-GI	In service	Global deck house Longitudinal/transverse directions	H-Type: 7th order Propellor: 3rd order Propellor: 6th order
	Nov - 2016	Shuttle tanker	123166 DWT	2 x 6S50ME-C8.1	In service	Local navigation deck Vertical floor vibration	H-Type: 6th order
	Feb - 2017	Shuttle tanker	123166 DWT	2 x 6S50ME-C8.1	In service	Local navigation deck Vertical floor vibration	H-Type: 6th order
	Jun - 2017	ConPax	19000 DWT	2 x 9S50ME-C8.5	In service	Local accomodation Cabin floor vertical vibration	X-Type: 5th order X-Type: 6th order Propellor: 5th order
	Mar - 2017	LNG Q-Flex	109503 DWT	2 x 6S70ME-C7	In service	Global deck house Longitudinal direction	H-Type: 6th order
×	Oct 2017	LNG carrier	-	2 x 7G70ME-C9.2-GI	In service	Local LNG pump tower Global navigation deck	H-Type: 7th order Propellor: 6th order
×	Nov - 2017	LNG carrier	98064 DWT	2 x 5G70ME-C9.5-GI	In service	Global navigaiton deck Longitudinal direction	L-Type: 7th order L-Type: 8th order M2V: 2nd order
×	Sep - 2018	LNG carrier	-	2 x 5G70ME-C9.5-GI	Commisioned on sea trial (by HHI-EMD)	Global navigaiton deck Longitudinal direction	Propellor: 3rd order (1 x BPF)
×	Feb - 2020	LNG carrier	173400 m3	2 x 5G70ME-C9.2 - GI	In service	Global navigaiton deck Longitudinal direction	L-Type 8th order L-Type 7th order

Working principle

The vibration reduction is achieved by synchronising the port and starboard shafts speeds, thereby out-balancing forces/moments from the starboard engine/propeller with the same forces/moments from the portside engine/propeller. Thereby a specific type of excitation and the way this excitation is transmitted into the hull structure can be minimised or changed, see Figs. 2 and 3.

The synchrophasing system will counteract the complex set of dynamic loads with the exact same level and in the same complex way by using the opposite engine (same symmetric force transmission path into the hull structure).

Basically, the opposite engine is transformed into a highly effective vibration compensator, thereby minimising most types of structural vibrations such as:

- Local engine frame vibration
- Vessel deck structures
- Accommodation areas/navigation deck
- Global hull girder bending modes.

Non-synchronised shaft lines and vibration beating

Until recently, two-stroke twin-propelled merchant vessels had non-synchronised shafting systems. This means individually controlled port and starboard engine control systems (ECSs) and individual speed set points.

Ideally, the port and starboard speed set points are equal for the same telegraph handle position. However, in reality there is more often a speed set point difference in the range 0.05-0.2 rpm. Now this can seem as a rather low and insignificant value, however,

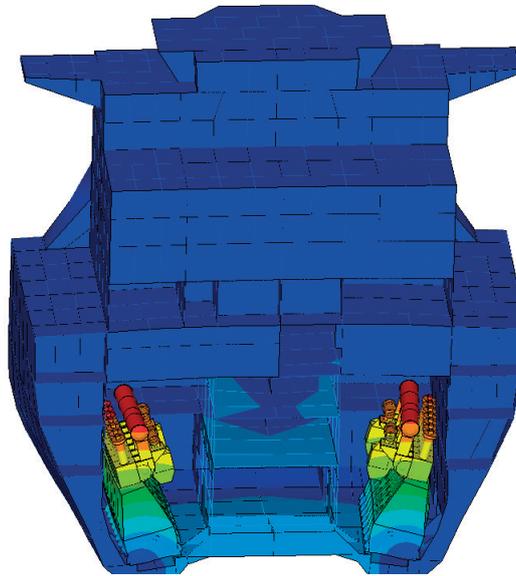


Fig. 2: Engine and hull vibration system on an LNG carrier subjected to main engines guide force moments.

Internal H-moment

Out-of-phase excitation

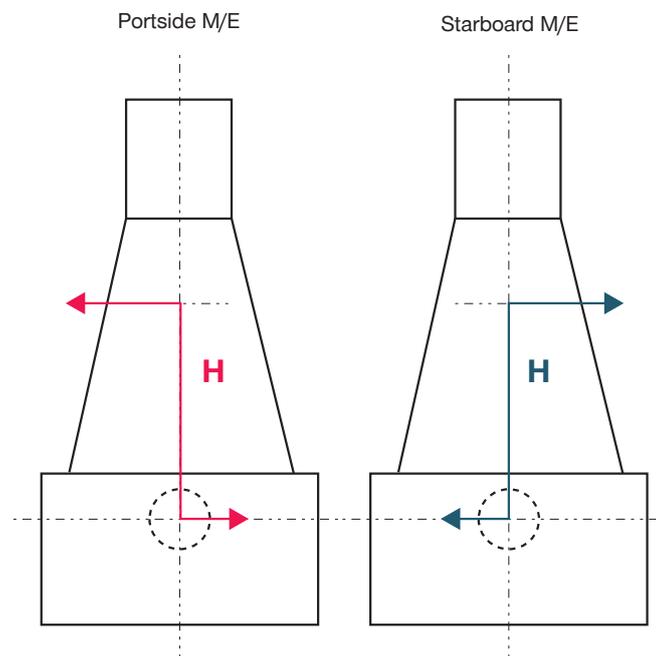


Fig. 3: Synchronised guide force moments (synchro phase = 0 deg.)

the impact on vibration beating is high, see Fig. 4.

The speed difference means that one propeller is running slightly faster than the opposite propeller and, thereby, continuously changes the relative propeller position - and hence also the vibration level.

In addition to speed set point differences, external disturbances from rudder, waves, wind and current will cause thrust and moment variations resulting in a completely random relative port and starboard propeller position that changes in time (for a definition of relative propeller position, see Fig. 5).

Due to one or both of these effects (set point difference + disturbance), vibration beating will always be present to some degree.

It could be said that the portside propeller is slowly “overtaking” the starboard side propeller (or vice versa) causing vibrations to increase and decrease with the rate of the speed difference.

The beating phenomena is also referred to as an interference pattern between the two engines where starboard and portside shaft speeds are slightly different (non-synchronised). For the non-synchronised shaft lines, the harmonic excitations from the two engines result in a constructive and destructive interference pattern, commonly known as “vibration beating.”

The key objective of the synchrophasing system is therefore to keep the synchrophase at a constant and optimal value in order to reduce the vibration levels and to avoid vibration beating.

Synchronisation by the synchrophasing system

The system aims to achieve:

- Constant and equal engine speeds

**LNG carrier
2 x MAN B&W 7G70ME-GI**

- Starboard + portside propulsion
- Non synchronised shaft lines
- High vibrations during beating cycle
- Discomfort due to beating

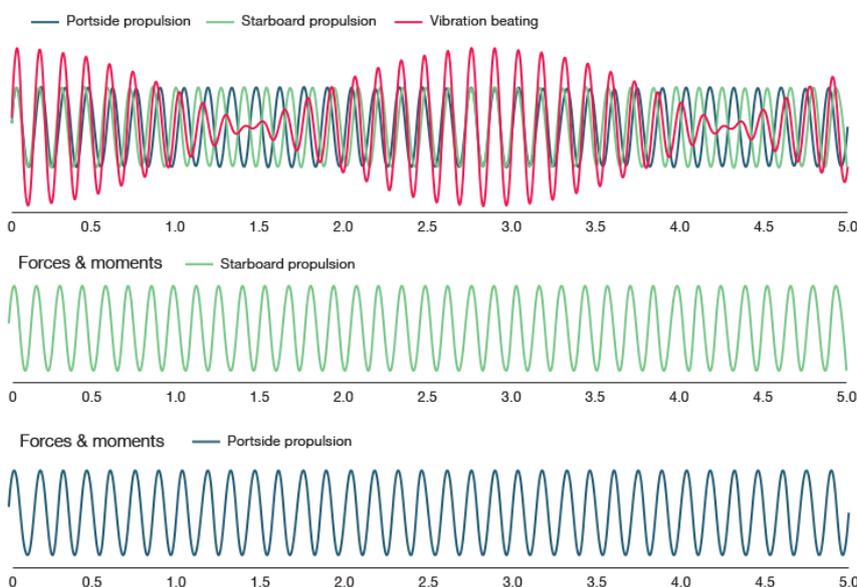
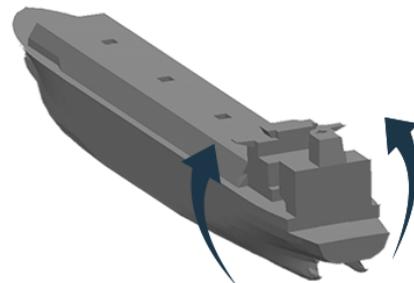


Fig. 4: Vibration beating in a non-synchronized twin propulsion system

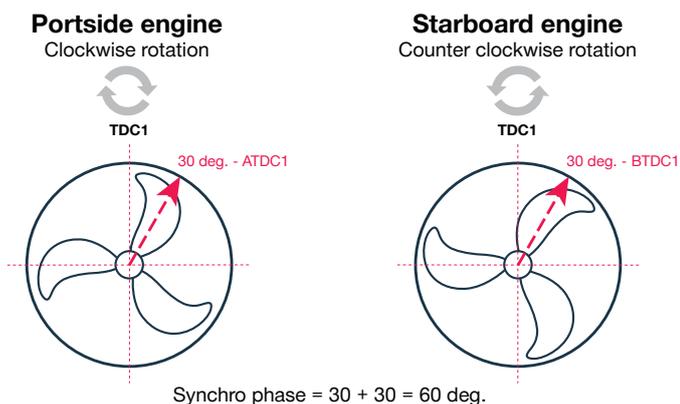


Fig. 5: Definition of synchrophase (example 60 deg.)

of port and starboard main engines in order to avoid beating type vibrations

- Constant and optimal synchro phase in order to reduce vibration levels

This means that not only will the system aim to achieve the same constant engine speed for the two engines, it will also keep a specific relative position (synchro phase) between the two shaft lines and propellers.

Vibration measurements

Figs. 6 and 7 show the measured beating vibrations as a function of time for 7G70ME-GI twin-engines on an LNG carrier and for 6S70ME-C twin-engines on an LNG QFlex, respectively. The measurements were made during sea trials before commissioning and prior to activation of the synchrophasing system.

It is common, not only in this 7G70ME-GI case, but in fact for all the reference vessels listed in Table 1, that pronounced beating phenomena are observed in vessel structures and accommodation areas for practically all sea conditions and engine speeds.

From the measurement plots, it is also clear that the vibration level is strongly dependant on the relative angular position of the propellers and shaft lines, the so-called synchro phase indicated as the black curve on Fig. 6.

Even though a rough estimate and selection of the optimal phase can be directly derived from such a simple time based plot, a more in-depth analysis of the frequency content is in general recommended for commissioning purposes. More advanced vibration analysis methods, such as FFT and/or Order Track method were used to select the optimal phase giving the lowest overall frequency-weighted vibration. The resulting vibration must be compared with the vibration limits stated in modern ISO standards.

LNG carrier with two MAN B&W 7G70ME-GI engines

Port/starboard speed set point difference: 0.5 rpm
 Dominant vibration: 7th order (firing frequency)
 Beating frequency: 0.058 Hz
 Time between beating cycles: 17 sec.

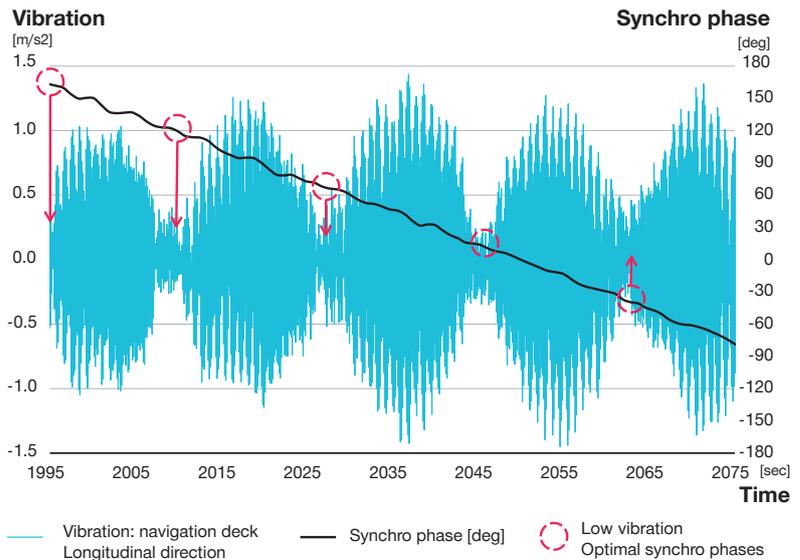


Fig. 6: Navigation deck – longitudinal direction (LNG carrier 2017)

LNG carrier with two MAN B&W 6S70ME-C

Port/Starboard speed set point difference: 0.1 rpm
 Dominant vibration: 6th order (firing frequency)
 Beating frequency: 0.01 Hz
 Time between beating cycles: 100 sec.

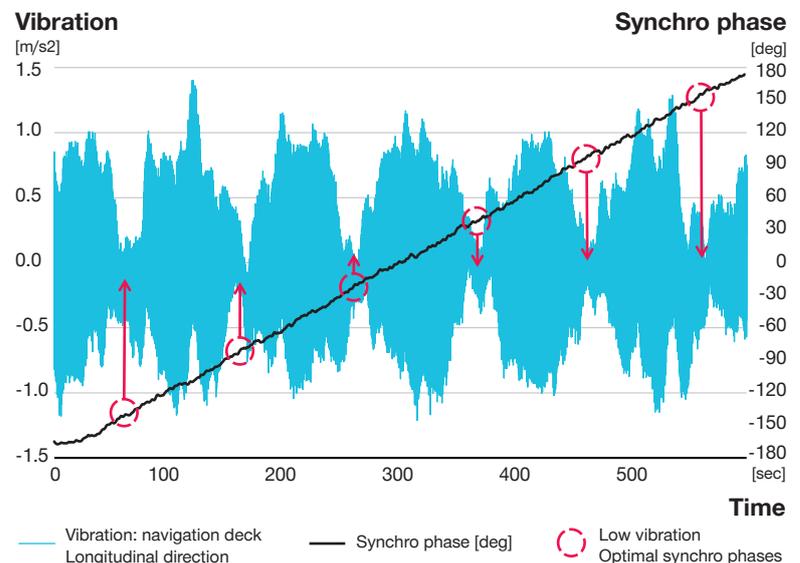


Fig. 7: Navigation deck – longitudinal direction (LNG Qflex 2006)

Choosing the optimal synchro phase(s) and relative propeller position

In general, the most optimal phase depends on the vibration characteristics of the specific and complex vibration system comprising hull, engine and propeller.

In addition, more than one vibration type can dominate the vessel vibration performance at the same or at different engine speeds for a given loading condition of the vessel.

Therefore, the selection of the optimal phase must be based on detailed commissioning vibration measurements taken in the full operational speed range of the main engines. The measurements should preferably cover both ballast and loaded conditions of vessel. It should be noted that the synchrophasing system must accommodate the potential situation of having six optimal synchro phases applied in each of their respective speed intervals (each optimal phase applied in a given speed range).

Fig. 8 shows the final synchrophasing commissioning result for the two 5G70ME-GI engines on an LNG carrier.

This result was obtained by using all six available synchronisation phases in their specific speed ranges, which was found by detailed vibration measurements during sea trial commissioning. An optimisation example at 64 rpm is shown in Fig. 9. The plot shows the overall vibration level as a function of the synchro phase. The plot also shows that to obtain the lowest longitudinal vibration of the navigation deck, the optimal synchro phase should be 36 degrees.

Factors influencing shaft synchronisation performance

The obtained vibration reduction is directly dependant on how well the system keeps the desired target synchronisation phase between the shaft lines.

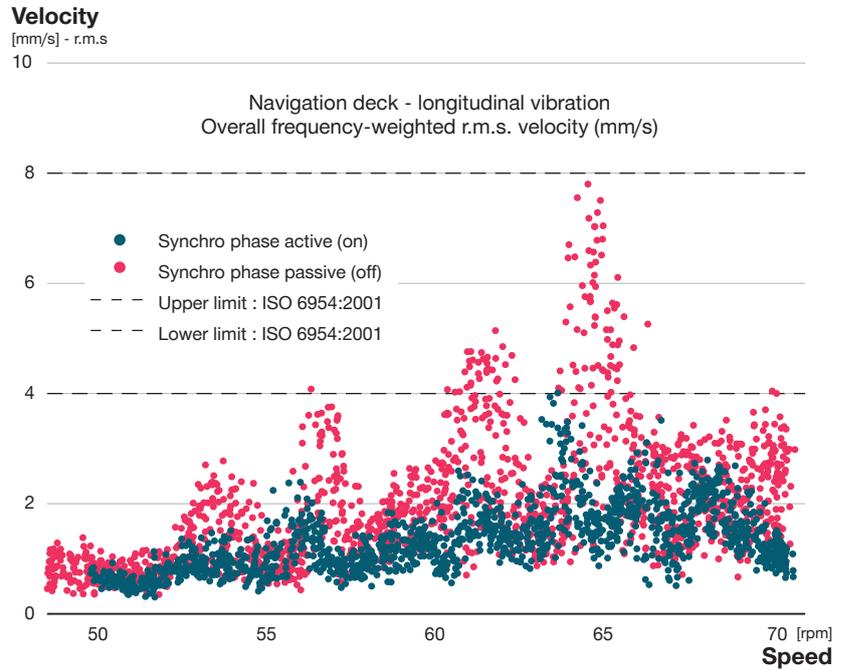


Fig. 8: Vibration reduction by synchrophasing for 5G70ME-GI engines on an LNG carrier

Overall frequency-weighted r.m.s. velocity (mm/s)
Frequency weighting ISO 2631-2.

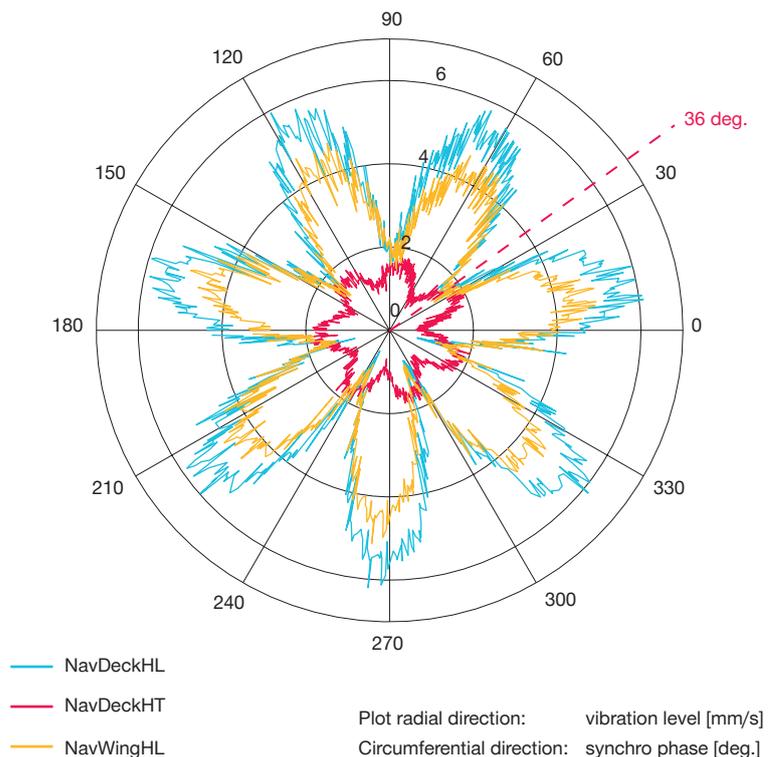


Fig. 9: 5G70ME-GI engine at 64 rpm, optimal phase = 36 deg.

The **key parameter** and a fundamental starting point for a good shaft synchronisation is the ability of the main engines' speed governors to obtain a stable and equal shaft speed of the two propulsion shaft lines.

External disturbances

The main engine's speed governor is challenged by external disturbances, primarily vessel roll and pitch (change of propeller wake field), where rolling has proved to be the most influential factor with respect to shaft synchronisation performance.

Vibration reduction

However, based on the many measurements, the average vibration reduction in normal sea conditions is in the range of 50–70%, when comparing the average vibration without synchrophasing (average vibration during a beating cycle) with the constant and low vibration achieved by synchronised shaft lines (active synchrophasing).

When comparing the maximum vibration level occurring during a beating cycle (no synchrophasing) with the synchronised vibration level (constant and low), the vibration reductions are in the range 70-90%.

Requirements, ordering and commissioning

The shipyard must specify synchrophasing in the EOD (extent of delivery), when ordering the engine.

The system requires:

- ECS software with synchrophasing functionality: For newbuildings, the synchrophasing software is optional and can be acquired as part of the design specification. For older electronically controlled engines (ME-C type), the ECS software can normally be upgraded to a newer version with synchrophasing

functionality.

- Synchronisation cables: Engines must be cross-connected with synchronisation cables according to drawings and diagrams found in the engine design specifications. Cables and manpower is provided by the licensee or the shipyard depending on the EOD agreements.
- Vibration measurements: The optimal phases resulting in the lowest vibration levels are found by making vibration measurements during sea trial or in service. Either MAN Energy Solutions or the engine licensee can be ordered to perform the commissioning. The measurements are often performed in close cooperation with the shipyard vibration specialist or hull designer. The vibration measurements are normally not included in the EOD, thus the shipyard must order this additional service separately.
- Commissioning software: MAN Energy Solutions provides customised synchrophasing commissioning software free of charge to be used by the licensee's vibration specialist.

Concluding remarks

In these times with ever increasing focus on higher performance parameters of our engine designs, we witness a correspondingly ever increasing dynamic excitation of the engine components. We are also in times of optimising our design which in effect means less steel for a given engine size. This in turn results in gradually reduced engine stiffness.

Combining increased dynamic excitation and reduced stiffness is virtually a dream scenario for a vibration specialist. It creates endless opportunities for mastering vibration challenges, which will continue to be one of our focus areas while developing our new engines over the time to come.

MAN Energy Solutions

2450 Copenhagen SV, Denmark

P +45 33 85 11 00

F +45 33 85 10 30

info-cph@man-es.com

www.man-es.com

All data provided in this document is non-binding. This data serves informational purposes only and is not guaranteed in any way. Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions.

Copyright © MAN Energy Solutions. 5510-0247-00
Jan 2024 Printed in Denmark